



DATA SHEET

USB-C° to HDMI° Audio/Video Adapter Converter - 4K 60Hz

Ideal solution for connecting a device with a USB-C port to an HDTV, projector, or other display with an HDMI port

OVERVIEW

This USB-C to HDMI Audio/Video Adapter Converter is an ideal solution for connecting a device with a USB-C port to an HDTV, projector, or other display with an HDMI port. This adapter supports up to a 4k (3840 x 2160) at 60Hz resolution, allowing it to deliver a high-quality video image to the connected display. The compact design of this adapter makes it a perfect pair for BYOD (Bring Your Own Device) applications in education or corporate environments. This adapter is an ideal accessory for Apple* and other leading laptops and tablets.

FEATURES

- Supports resolutions up to 4K (3840 x 2160) at 60Hz
- Compatible with USB-C, Thunderbolt[™] 3 and Thunderbolt[™] 4 ports
- A reversible, symmetrical USB-C connector
- Compact, lightweight design
- Plug and Play—no driver required
- Compatible with the Apple[®] MacBook[®], MacBook Air[®], and MacBook Pro[®]

ITEM DESCRIPTION

C2G26935 USB-C* to HDMI* Audio/Video Adapter Converter - 4K 60Hz - Black C2G26936 USB-C* to HDMI* Audio/Video Adapter Converter - 4K 60Hz - White

DATA SHEET

ELECTRICAL SPECIFICATIONS

Voltage: 30VTemperature Rating: 80°C

Conductor Resistance: at 20°C Max 34AWG: 856.3 Ω/km

Insulation Resistance: 10M-km Min at 20°C DC

500V (EIA-364-21)

Dielectric Strength: AC 500V/1 minute No breakdown

PHYSICAL CHARACTERISTICS

(EIA-364-20)

 Connector 1: USB Type-C 3.2 Male; Contacts: Terminal Gold Flash, Nickel Plated Shell, Black Insulation

 Connector 2: HDMI Female, Contacts: Terminal Gold Flash, Nickel Plated Shell, Black Insulation Chipset: IC VL100Jacket Rating: VW-1

Overall Cable Dimension: 4.0mm, BlackMinimum Bend Radius: 40mm

- Adapter Length: 100±15mm - Molding: Black PVC

- Operating temperature: 0° - 45°C; 15-85% Relative

Humidity (Non-Condensing)


Storage temperature: -10°C - 70°C; 15-85% Relative

QC Inspection: Humidity (Non-Condensing)

QC Inspection: 100% of Image Test:

3840 x 2160 @60Hz

Product is CE Marked and conforms to 2011/65/EU RoHS2

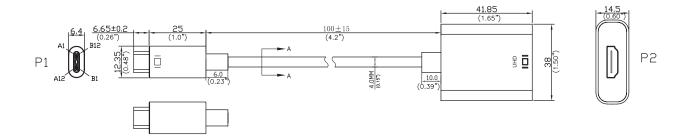



LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY

USA 800.506.9607 | c2g.com | legrandav.com | customer-service@c2g.com

EMEA +31 495 580 840 | c2g.com/uk | legrandav.com | c2g.emea@av.legrand.com